


A1 Microwave


X-band Satcoms Downconverter Filter, Model PB1044WB

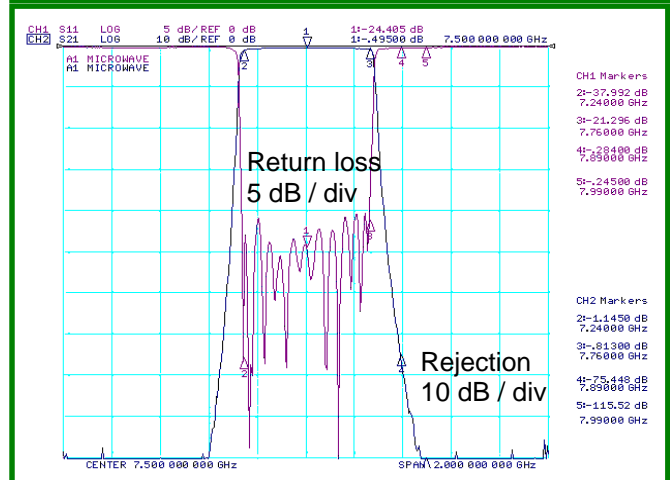

- Low insertion loss
- High Transmitter rejection

The PB1044WB bandpass filter is designed for X band satcoms downconverter applications for suppressing Transmit band signals.

The PB1044WB is one of a family of filters for X band downconverter applications.

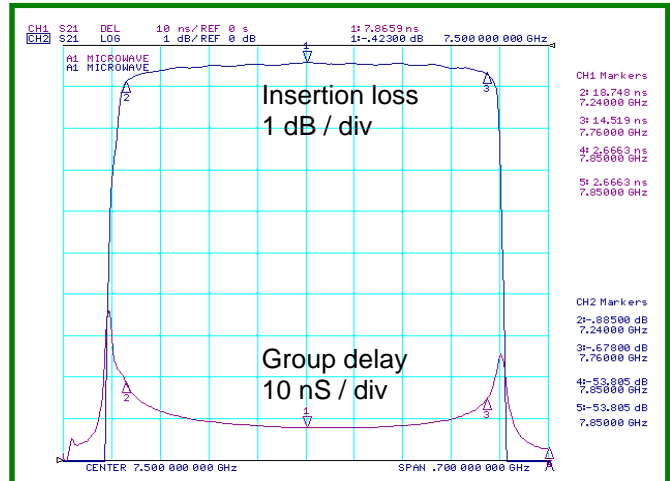

Ordering information :- Model number PB1044WB

Passband	7.25 to 7.75 GHz
Centre frequency insertion loss	0.5 dB typical
Rejection :	from 7.9 to 8 GHz 70 dB min
	from 8 to 8.4 GHz 90 dB min
Overall length	440 mm nominal
Connectors	SMA female (Waveguide alternatives available)

Enquiries@A1Microwave.com is your fastest route to custom designed microwave and RF filters, diplexers, passive coaxial and waveguide components, 100 MHz to 50 GHz

Sales office : A1 Microwave Ltd. 27 Coopers Yard, Newark, Notts, NG24 4UH, England

Telephone : +44 (0) 1636 707 642

Fax : +44 (0) 1636 707 643

E mail : enquiries@A1Microwave.com

Web : <http://www.A1Microwave.com>

Issued :- 07 November 2006