


Dry Shut Foot Control Valves

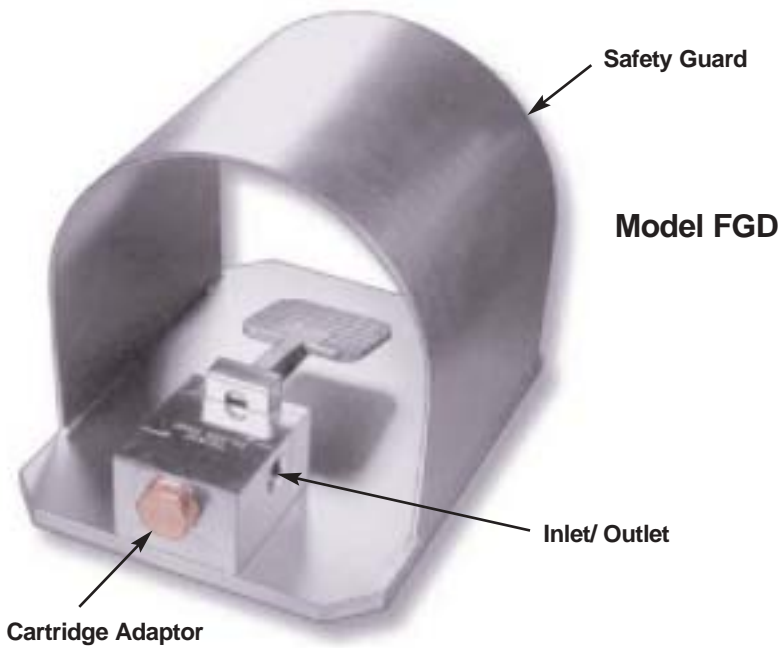


Model	Working Pressure max. bar / PSI	Hose Connection
FG 15 DS	1,000 / 15,000	1/2" M24
FG 20 DS	1,400 / 20,000	1/2" M24

Alternative connections available on request.

Dry shut foot valves must be used in conjunction with a pressure unloader valve.

60 Second Cartridge Overhaul

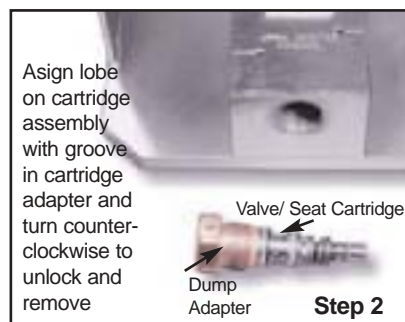

*Guns and Foot Valves use same cartridge overhaul kits.