


# UHP High Efficiency Tube Cleaning Nozzles

Material: Stainless steel with hard steel inserts.



Orifice locations

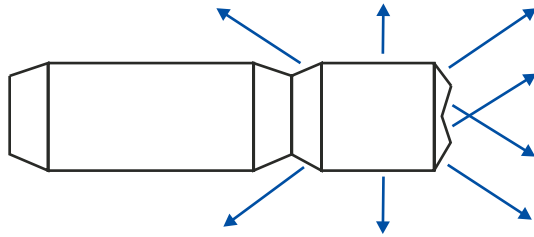

Nozzle Type	OD (mm)	Connection (female)	Length (mm)	Orifice	Insert configuration (12 x M3 x 0,5 female)	Working Pressure max. bar / PSI
48381612	17.5	$\frac{3}{8}$ " - 24UNF LH	48	Steel Insert	2 x off centre 10° / 2 x 30° front	3,000 / 43,500
569161912	19	$\frac{9}{16}$ " - 18UNF LH	56	Steel Insert	4 x 80° backwards / 4 x 45° backwards	3,000 / 43,500

Material: Stainless steel.



Nozzle Type	OD (mm)	Connection (male with 58° cone)	Length (mm)	Orifice	Insert configuration (M3 x 0,5 female)	Working Pressure max. bar / PSI
381047	10	M7 x 1	38	Steel Insert	2 x Front 15° / 2 x 90°	2,000 / 30,000
421037			42	Steel Insert	1 x 0° Front / 2 x 15° Front	2,000 / 30,000
421057				Steel Insert	1 x 0° Front / 4 x 15° Front	2,000 / 30,000
4214310	14	M10 x 1		Steel Insert	1 x 0° Front / 2 x 15° Front	2,000 / 30,000