
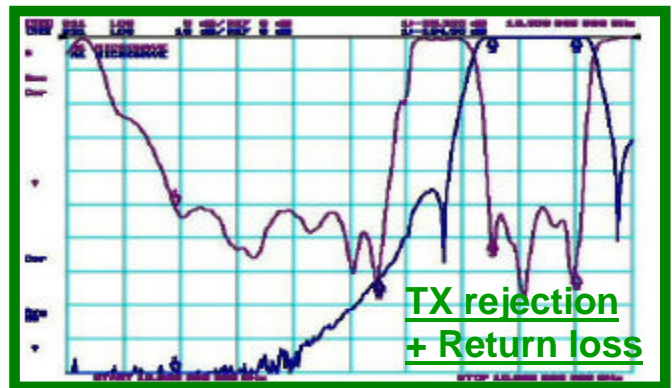


# A1 Microwave

## Microwave and RF Filter solutions

1 MHz to 40 GHz **with NO NRE**  
Also Transmit arms, Magic Tees, Couplers  
and Waveguide passive components

## Ku-band Satcoms Full band Diplexer, Model PB1099WA

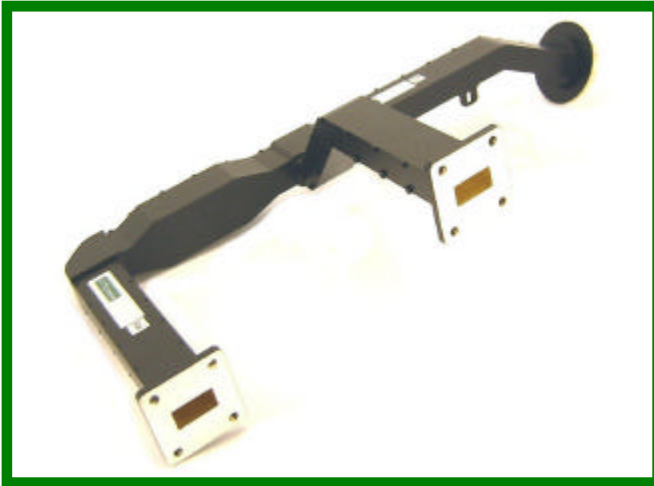

### FEATURES :

- 1 - No-tuners design
- 2 - Custom outline including multiple bends
- 3 - Low insertion losses
- 4 - Quick release flange

### Ordering information :- Model number PB1099WA

Passbands	10.95 to 12.75 GHz and 13.75 to 14.5 GHz
Passband insertion loss	0.25 dB typical RX, 0.2 dB typical TX
Passband return loss	23 dB min
TX rejection	120 dB min
RX rejection	60 dB min
Flanges	UBR 120 (alternatives available)

## **Sales@A1Microwave.com** your fastest route to custom designed filters

**A1 Microwave Ltd.** Units 1 and 2 Chalet Farm, Sledmere Road, Langtoft, Driffield, East Yorkshire, YO25 3BT, England

Telephone : +44 (0) 1377 267 325

Mobile : +44 (0) 7903 64 64 95

Fax : +44 (0) 1377 267 325

E-mail : Sales@A1Microwave.com

Web : <http://www.A1Microwave.com>

Issued :- 23 August 2004