


# A1 Microwave

## Radar Highpass Filter, Model PB1068WH

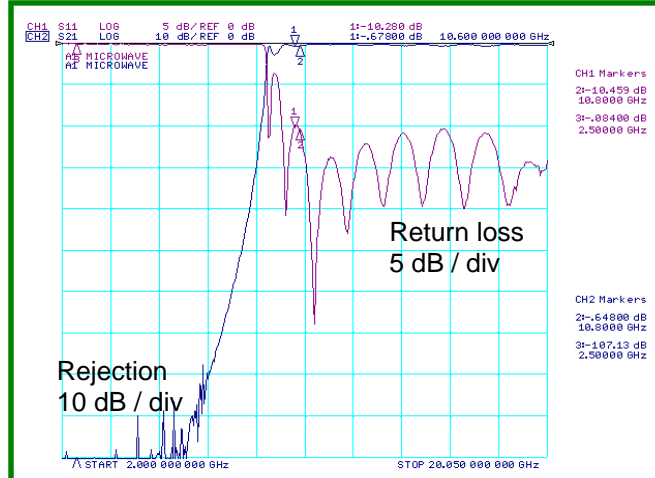

- Pass 10 and 24 GHz radars
- High rejection of 3 GHz radar

The PB1068WH highpass filter is designed for radar applications for suppressing interference from 3 GHz radars.

The PB1068WH is one of a family of filters covering all the radar bands.

### Ordering information :- Model number PB1068WH

Passbands	10.6 to 24.3 GHz
Passband insertion loss	1.0 dB max
Rejection : from DC to 3 GHz	90 dB min
Overall length	80 mm nominal
Weight	80 g
Connectors	SMA male + female (alternatives available)

**Enquiries@A1Microwave.com is your fastest route to custom designed microwave and RF filters, duplexers, passive coaxial and waveguide components, 100 MHz to 50 GHz**

Sales office : A1 Microwave Ltd. 27 Coopers Yard, Newark, Notts, NG24 4UH, England

Telephone : +44 (0) 1636 707 642

Fax : +44 (0) 1636 707 643

E mail : enquiries@A1Microwave.com

Web : <http://www.A1Microwave.com>

Issued :- 10 November 2006