


Type SISFBR

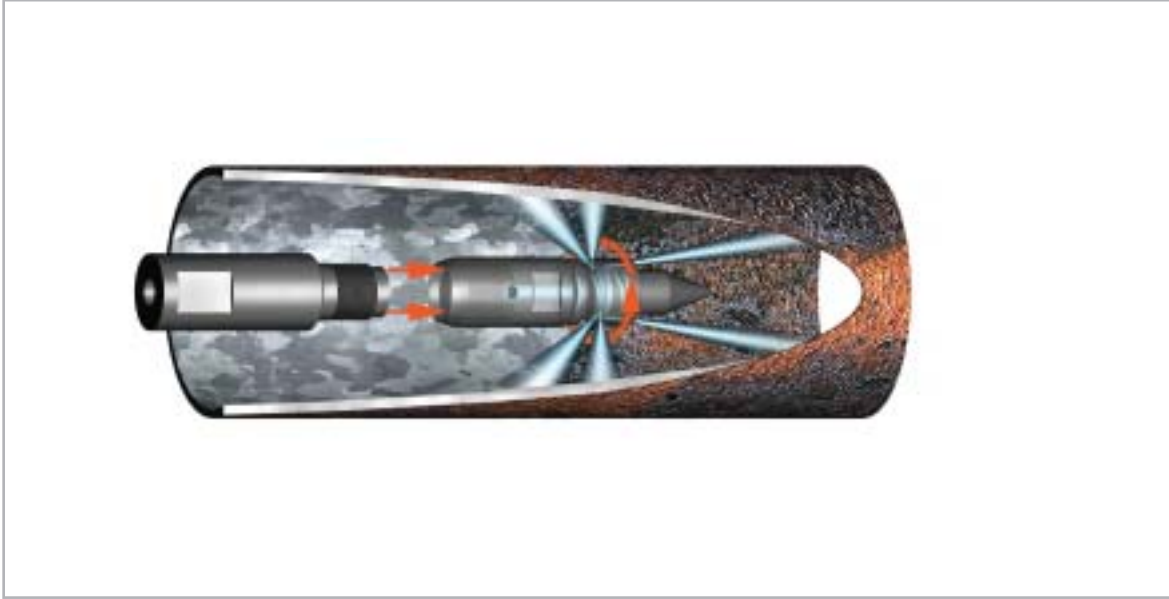

Rotating Nozzle Type SISFBR


Characteristics:

- 2 jets rotating 45° back, 2 jets 90° rotating and 2 jets rotating to the front.
- Suitable for cleaning plugged pipes.
- Can be attached straight onto a flexible hose.
- Available with an extra front jet for increased forward power.
- Especially suitable for a freelance machine.



Recommendation:

- If the diameter of the tube is greater than the length of the nozzle, always use a rigid extension lance between the flexible hose and the nozzle.

Notes:

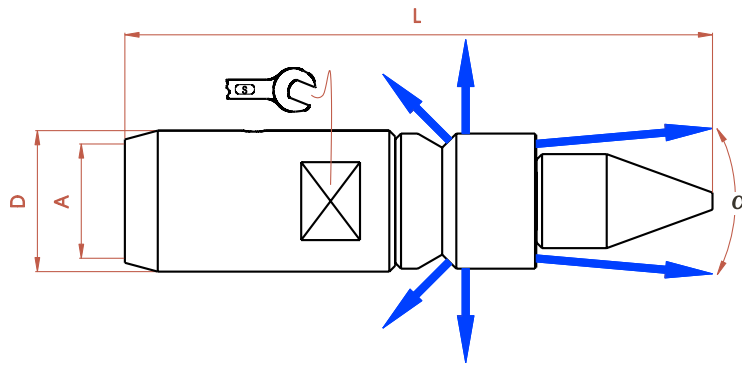

Type SISFBR

D mm	L mm	S mm	α	A	Part Number		Max. W.P. Bar/PSI		
									
ø10	46	8	10°	M7x1F	6101.210	6101.2101	1000/15.000		
				1/16"NPTF	6101.210116	6101.2101116			
	1/4"UNFMPLHF	6101.21014ML		6101.2101114ML	1500/21.500				
	1/4"UNFMPRHF	6101.21014MR		6101.2101114MR					
	52	5/16"UNFM		6101.210516	6101.2101516	1000/15.000			
ø12	50	10		1/8"BSPF	6101.212	6101.2121	1250/18.000		
				1/8"NPTF	6101.21218	6101.212118			
				3/8"UNFMPLHF	6101.21238ML	6101.212138ML	1500/21.500		
				3/8"UNFMPRHF	6101.21238MR	6101.212138MR			
ø16	64	13		1/8"BSPF	6101.216	6101.2161	1000/15.000		
			1/4"BSPF	6101.218	6101.2181				
ø18	54	16	1/4"NPTF	6101.21814	6101.218114	1500/21.500			
			9/16"UNFMPLHF	6101.218916ML	6101.2181916ML				
			9/16"UNFMPRHF	6101.218916MR	6101.2181916MR				
			ø22	75	19	1/4"BSPF	6101.222	6101.2221	1000/15.000
3/8"NPTF	6101.22238N	6101.222138N							
3/8"BSPF	6101.22238	6101.222138							
ø28	70	25	30°	1/4"BSPF	6101.228	6101.2281	1250/18.000		
	81			1/2"BSPM	6101.228.12M	6101.2281.12M			
	75	26		1/2"NPTF	6101.228.12N	6101.2281.12N			
	81	25		3/8"BSPM	6101.228.38M	6101.2281.38M			
	86			M24x1,5M	6101.228.24M	6101.2281.24M			
ø40	87	-		40°	M24x1,5F	6101.240.24M	6101.2401.24M	1250/18.000	
	114				1/4"BSPF	6101.240.14F	6101.2401.14F		
					1/4"BSPM	6101.240.14M	6101.2401.14M		
	117				27	3/8"BSPM	6101.240.38M		6101.2401.38M
	122				27	1/2"BSPM	6101.240.12M		6101.2401.12M
M24x1,5M		6101.240.24M	6101.2401.24M						

M= Male thread
F= Female thread