

Type TN Tower Nozzle



Rotating Nozzle Type TN Tower Nozzle


Characteristics:

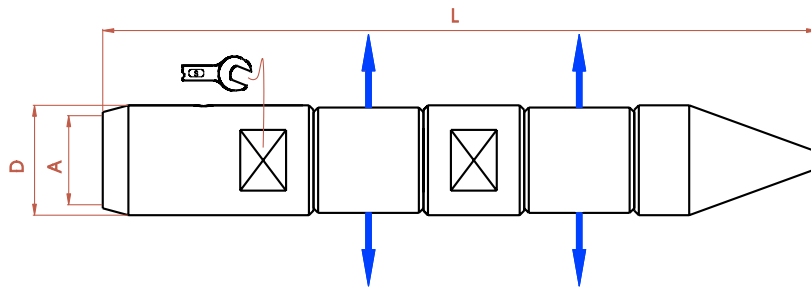
- Combination of 2 rotors, in which the rotors turn in opposite directions to give a perfect cleaning result.
- 2 rotors each with 4 jets rotating 90° to the side.
- Available with one or more front jets for the removal of any blockages.
- Specially developed for the cleaning of hard and sticky pollution.
- The Tower Nozzles are used often at sugar refineries and in cases of extreme hard or tough pollution.

Recommendation:




- If the diameter of the tube is greater than the length of the nozzle, always use a rigid extension lance between the flexible hose and the nozzle.

Notes:





Type TN Tower Nozzle

D mm	L mm	S mm	A	Part Number			Max. W.P. Bar/PSI
							
ø10	73	8	M7x1F	6210.4	6210.41	6210.4106	1000/15.000
			1/16"NPTF	6210.4116	6210.41116	6210.410616	
			1/4"UNFMPLHF	6210.414ML	6210.4114ML	6210.410614ML	
			1/4"UNFMPRHF	6210.414MR	6210.4114MR	6210.410614MR	
	79	5/16"UNFM	6210.4516	6210.41516	6210.4106516	1000/15.000	
ø12	78	10	1/8"BSPF	6212.4	6212.41	6212.4106	1250/18.000
			1/8"NPTF	6212.418	6212.4118	6212.410618	
			3/8"UNFMPLHF	6212.438ML	6212.4138ML	6212.410638ML	
			3/8"UNFMPRHF	6212.438MR	6212.4138MR	6212.410638MR	
ø16	104	13	1/8"BSPF	6216.4	6216.41	6216.4106	1000/15.000
ø18	109	16	1/4"BSPF	6218.4	6218.41	6218.4106	1500/21.500
			1/4"NPTF	6218.414	6218.4114	6218.410614	
			9/16"UNFMPLHF	6218.4916ML	6218.41916ML	6218.4106916ML	
			9/16"UNFMPRHF	6218.4916MR	6218.41916MR	6218.4106916MR	
ø22	115	19	1/4"BSPF	6222.4	6222.41	6222.4106	1000/15.000
			3/8"NPTF	6222.438N	6222.4138N	6222.410638N	
			3/8"BSPF	6222.438	6222.4138	6222.410638	
ø28	128	25	1/4"BSPF	6228.4	6228.41	6228.4108	1250/18.000
	139		1/2"BSPM	6228.4.12M	6228.41.12M	6228.4108.12M	
	133	26	1/2"NPTF	6228.4.12N	6228.41.12N	6228.4108.12N	
	139	25	3/8"BSPM	6228.4.38M	6228.41.38M	6228.4108.38M	
	144		M22x1,5M	6228.4.22M	6228.41.22M	6228.4108.22M	
ø40	165	-	M24x1,5F	6240.4	6240.41	6240.4108	1250/18.000
	124		1/4"BSPF	6240.4.14F	6240.41.14F	6240.4108.14F	
	127	27	1/4"BSPM	6240.4.14M	6240.41.14M	6240.4108.14M	
			3/8"BSPM	6240.4.38	6240.41.38	6240.4108.38	
			1/2"BSPM	6240.4.12	6240.41.12	6240.4108.12	
132	27	M22x1,5M	6240.4.22	6240.41.22	6240.4108.22		

M= Male thread
F= Female thread