

Type TNBR Tower Nozzle



Rotating Nozzle Type TNBR Tower Nozzle

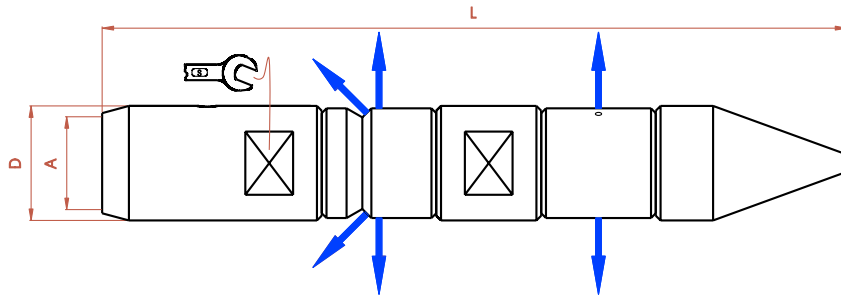
Characteristics:

- Combination of 2 rotors, in which the rotors turn in opposite directions to give a perfect cleaning result.
- 1 rotor with 4 jets rotating 90° and 1 rotor with 2 jets rotating 90° and 2 jets rotating 45° back.
- Available with one or more front jets for the removal of any blockages.
- Because of the pulling jets this nozzle can be used straight on a flexible hose.
- Specially developed for the cleaning of hard and sticky pollution.
- The Tower Nozzles are used often at sugar refineries and in cases of extreme hard or tough pollution.




Recommendation:

- If the diameter of the tube is greater than the length of the nozzle, always use a rigid extension lance between the flexible hose and the nozzle.

Notes:



Type TNBR Tower Nozzle

D mm	L mm	S mm	A	Part Number			Max. W.P. Bar/PSI
							
ø10	73	8	M7x1F	6210.2	6210.21	6210.2106	1000/15.000
			1/16"NPTF	6210.2116	6210.21116	6210.210616	
			1/4"UNFMPLHF	6210.214ML	6210.2114ML	6210.210614ML	
			1/4"UNFMPRHF	6210.214MR	6210.2114MR	6210.210614MR	
	79		5/16"UNFM	6210.2516	6210.21516	6210.2106516	1000/15.000
ø12	78	10	1/8"BSPF	6212.2	6212.21	6212.2106	1250/18.000
			1/8"NPTF	6212.218	6212.2118	6212.210618	
			3/8"UNFMPLHF	6212.238ML	6212.2138ML	6212.210638ML	
			3/8"UNFMPRHF	6212.238MR	6212.2138MR	6212.210638MR	
ø16	104	13	1/8"BSPF	6216.2	6216.21	6216.2106	1000/15.000
ø18	109	16	1/4"BSPF	6218.2	6218.21	6218.2106	1500/21.500
			1/4"NPTF	6218.214	6218.2114	6218.210614	
			9/16"UNFMPLHF	6218.2916ML	6218.21916ML	6218.2106916ML	
			9/16"UNFMPRHF	6218.2916MR	6218.21916MR	6218.2106916MR	
ø22	115	19	1/4"BSPF	6222.2	6222.21	6222.2106	1000/15.000
			3/8"NPTF	6222.238N	6222.2138N	6222.210638N	
			3/8"BSPF	6222.238	6222.2138	6222.210638	
ø28	128	25	1/4"BSPF	6228.2	6228.21	6228.2108	1250/18.000
	139		1/2"BSPM	6228.2.12M	6228.21.12M	6228.2108.12M	
	133	26	1/2"NPTF	6228.2.12N	6228.21.12N	6228.2108.12N	
	139	25	3/8"BSPM	6228.2.38M	6228.21.38M	6228.2108.38M	
	144		M22x1,5M	6228.2.22M	6228.21.22M	6228.2108.22M	
ø40	165	-	M24x1,5F	6240.2	6240.21	6240.2108	1250/18.000
	124		1/4"BSPF	6240.2.14F	6240.21.14F	6240.2108.14F	
	127	27	1/4"BSPM	6240.2.14M	6240.21.14M	6240.2108.14M	
			3/8"BSPM	6240.2.38	6240.21.38	6240.2108.38	
			1/2"BSPM	6240.2.12	6240.21.12	6240.2108.12	
132	27	M22x1,5M	6240.2.22	6240.21.22	6240.2108.22		

M= Male thread
F= Female thread