
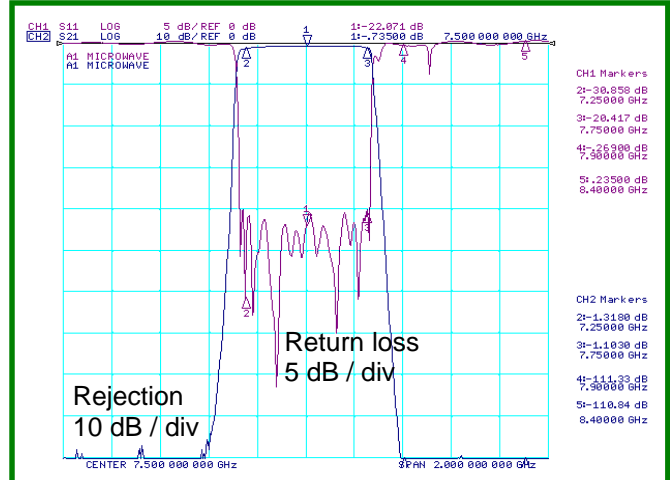


A1 Microwave

X-band Satcoms Downconverter Filter, Model PB1064WA

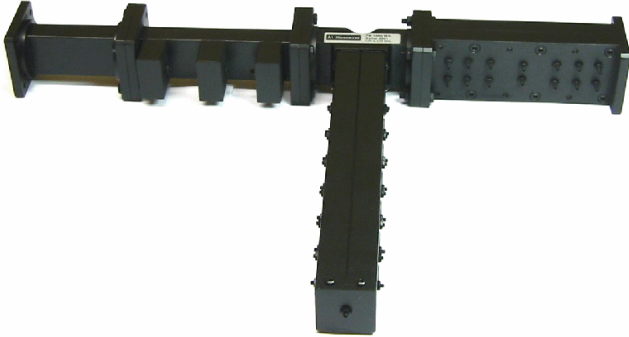

- Multi-function assembly for
- Extremely high rejection


The PB1064WA assembly comprises of :-

A folded bandpass filter for high TX rejection in a short length

A lowpass filter for broad band spurious rejection

And a notch filter for tight close in rejection

The PB1064WA is one of a family of filters covering the standard X band transmit and receive bands.

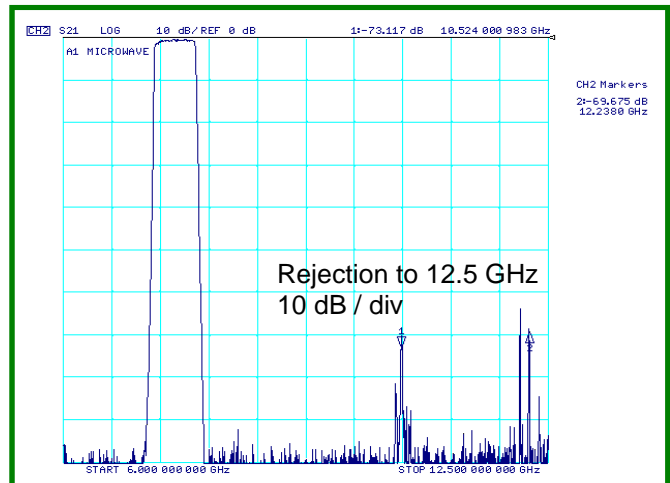

Ordering information :- Model number PB1064WA

| | |
|---------------------------------|---|
| Passband | 7.25 to 7.75 GHz |
| Centre frequency insertion loss | 1.3 dB typical |
| Passband return loss | 18 dB min |
| Rejection : | from 7.9 to 10.5 GHz 110 dB min |
| Connectors | UBR 84 flanges (alternatives available) |

Enquiries@A1Microwave.com is your fastest route to custom designed microwave and RF filters, diplexers, passive coaxial and waveguide components, 100 MHz to 50 GHz

Sales office : A1 Microwave Ltd. 27 Coopers Yard, Newark, Notts, NG24 4UH, England

Telephone : +44 (0) 1636 707 642

Fax : +44 (0) 1636 707 643

E mail : enquiries@A1Microwave.com

Web : <http://www.A1Microwave.com>

Issued :- 13 November 2006