

Type TNBB Tower Nozzle



Rotating Nozzle Type TNBB Tower Nozzle

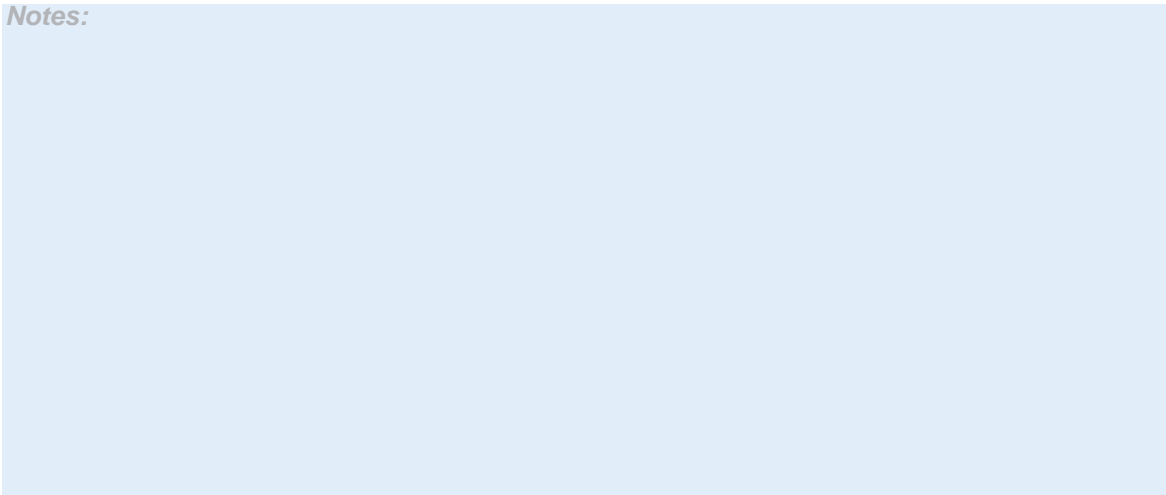
Characteristics:

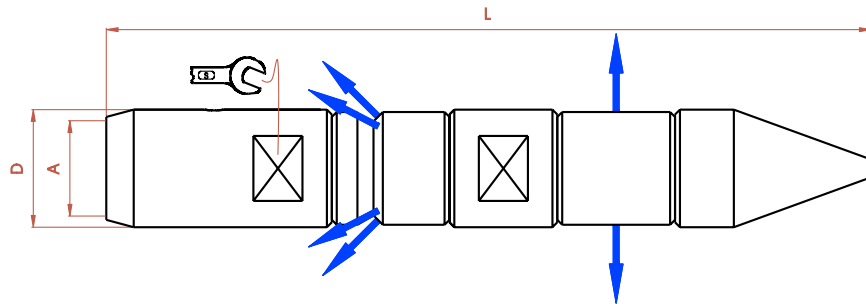
- Combination of 2 rotors, in which the rotors turn in opposite directions to give a perfect cleaning result.
- 1 rotor with 4 jets rotating 90° to the side and 1 rotor with 4 jets rotating 45° back.
- Available with one or more front jets for the removal of any blockages.
- Because of the 45° pulling jets this nozzle can be mounted straight onto a flexible hose.
- Specially developed for the cleaning of hard and sticky pollution.
- The Tower Nozzles are used often at sugar refineries and in cases of extreme hard or tough pollution.

Recommendation:




- If the diameter of the tube is greater than the length of the nozzle, always use a rigid extension lance between the flexible hose and the nozzle.

Notes:





Type TNBB Tower Nozzle

D mm	L mm	S mm	A	Part Number			Max. W.P. Bar/PSI
							
ø10	73	8	M7x1F	6210	6210.01	6210.0106	1000/15.000
			1/16"NPTF	6210.116	6210.01116	6210.010616	
			1/4"UNFMPLHF	6210.14ML	6210.0114ML	6210.010614ML	
			1/4"UNFMPRHF	6210.14MR	6210.0114MR	6210.010614MR	
	79		5/16"UNFM	6210.516	6210.01516	6210.0106516	1000/15.000
ø12	78	10	1/8"BSPF	6212	6212.01	6212.0106	1250/18.000
			1/8"NPTF	6212.18	6212.0118	6212.010618	
			3/8"UNFMPLHF	6212.38ML	6212.0138ML	6212.010638ML	
			3/8"UNFMPRHF	6212.38MR	6212.0138MR	6212.010638MR	
ø16	104	13	1/8"BSPF	6216	6216.01	6216.0106	1000/15.000
ø18	109	16	1/4"BSPF	6218	6218.01	6218.0106	
			1/4"NPTF	6218.14	6218.0114	6218.010614	
			9/16"UNFMPLHF	6218.916ML	6218.01916ML	6218.0106916ML	
			9/16"UNFMPRHF	6218.916MR	6218.01916MR	6218.0106916MR	
ø22	115	19	1/4"BSPF	6222	6222.01	6222.0106	1000/15.000
			3/8"NPTF	6222.38N	6222.0138N	6222.010638N	
			3/8"BSPF	6222.38	6222.0138	6222.010638	
ø28	128	25	1/4"BSPF	6228	6228.01	6228.0108	1250/18.000
	139		1/2"BSPM	6228.12M	6228.01.12M	6228.0108.12M	
	133	26	1/2"NPTF	6228.12N	6228.01.12N	6228.0108.12N	
	139		3/8"BSPM	6228.38M	6228.01.38M	6228.0108.38M	
	144		M22x1,5M	6228.22M	6228.01.22M	6228.0108.22M	
ø40	165	-	M24x1,5F	6240	6240.01	6240.0108	1250/18.000
			1/4"BSPF	6240.14F	6240.01.14F	6240.0108.14F	
	124	27	1/4"BSPM	6240.14M	6240.01.14M	6240.0108.14M	
	127		3/8"BSPM	6240.38	6240.01.38	6240.0108.38	
			1/2"BSPM	6240.12	6240.01.12	6240.0108.12	
	132		M22x1,5M	6240.22	6240.01.22	6240.0108.22	

M= Male thread
F= Female thread