

Type TNSF Tower Nozzle



Rotating Nozzle Type TNSF Tower Nozzle


Characteristics:


- Combination of 2 rotors, in which the rotors turn in opposite directions to give a perfect cleaning result.
- 1 rotor with 4 jets rotating 90° to the side and 1 rotor with 2 jets rotating 75° back. and 2 jets rotating to the front.
- Available with one extra front jet for the removal of any blockages.
- Specially developed for the cleaning of hard and sticky pollution.
- The Tower Nozzles are used often at sugar refineries and in cases of extreme hard or tough pollution.

Recommendation:



- When using a flexible hose we advise you to use a TNSFBR or a TNSFBB because of the pulling jets.
- If the diameter of the tube is greater than the length of the nozzle, always use a rigid extension lance between the flexible hose and the nozzle.

Notes:



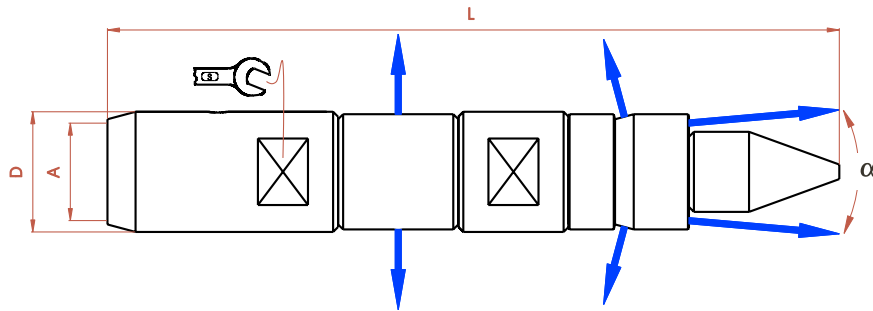

Type TNSF Tower Nozzle

D mm	L mm	S mm	α	A	Part Number		Max. W.P. Bar/PSI
							
ø10	69	8	10°	M7x1F	6210.110	6210.1101	1000/15.000
				1/16"NPTF	6210.110116	6210.1101116	
	1/4"UNFMPLHF			6210.11014ML	6210.1101114ML	1500/21.500	
	1/4"UNFMPRHF			6210.11014MR	6210.1101114MR		
	72			5/16"UNFM	6210.110516	6210.1101516	1000/15.000
75	1/8"BSPF	6212.112		6212.1121	1250/18.000		
ø12	73	10		1/8"NPTF		6212.11218	6212.112118
				3/8"UNFMPLHF	6101.11238ML	6101.112138ML	
				3/8"UNFMPRHF	6101.11238MR	6101.112138MR	
ø16	97	13		1/8"BSPF	6216.116	6216.1161	1000/15.000
			1/4"BSPF	6218.118	6218.1181		
ø18	100	16	1/4"NPTF	6218.11814	6218.118114	1500/21.500	
			9/16"UNFMPLHF	6218.118916ML	6218.1181916ML		
			9/16"UNFMPRHF	6218.118916MR	6218.1181916MR		
			1/4"BSPF	6222.122	6222.1221	1000/15.000	
ø22	108	19	3/8"NPTF	6222.12238N	6222.122138N		
			3/8"BSPF	6222.12238	6222.122138		
			1/4"BSPF	6228.128	6228.1281	1250/18.000	
ø28	121	25	1/2"BSPM	6228.128.12M	6228.1281.12M		
	132		1/2"NPTF	6228.128.12N	6228.1281.12N		
	126	25	3/8"BSPM	6228.128.38M	6228.1281.38M		
	132		M24x1,5M	6228.128.24M	6228.1281.24M		
	137		M24x1,5F	6240.140.24M	6240.1401.24M	1250/18.000	
ø40	155	-	1/4"BSPF	6240.140.14F	6240.1401.14F		
	170		1/4"BSPM	6240.140.14M	6240.1401.14M		
	180		3/8"BSPM	6240.140.38M	6240.1401.38M		
			1/2"BSPM	6240.140.12M	6240.1401.12M		
	185		M24x1,5M	6240.140.24M	6240.1401.24M		

M= Male thread
F= Female thread