


Type TNSFBR Tower Nozzle

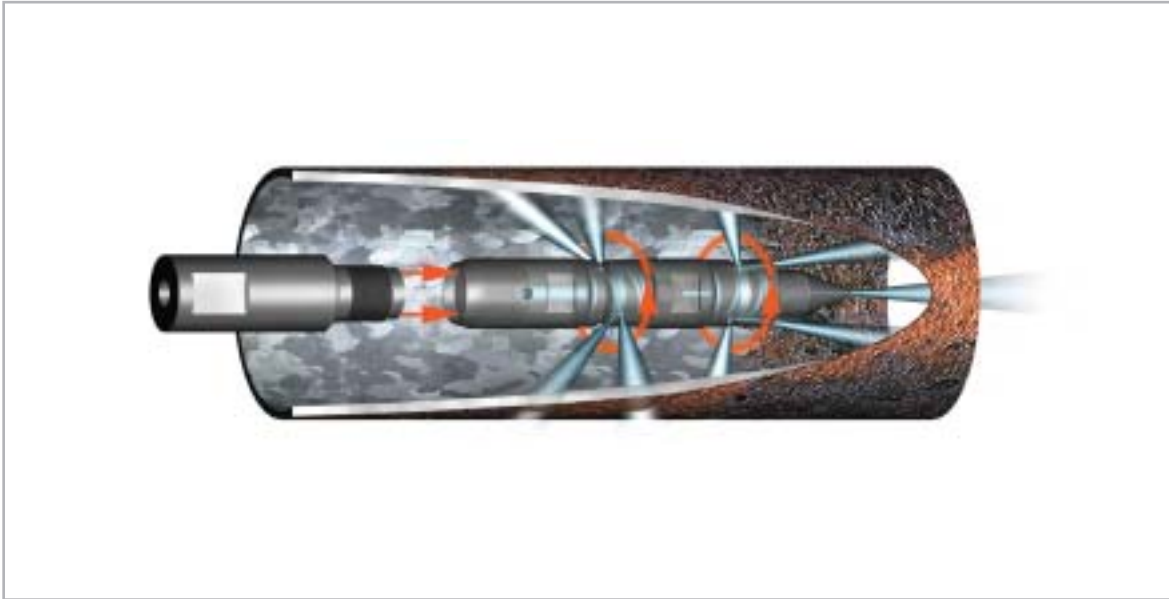

Rotating Nozzle Type TNSFBR Tower Nozzle


Characteristics:


- Combination of 2 rotors, in which the rotors turn in opposite directions to give a perfect cleaning result.
- 1 rotor with 2 jets rotating 45° back and 2 jets rotating 90° to the side and 1 rotor with 2 jets rotating 75° to the side and 2 jets rotating to the front.
- Available with one extra front jet for the removal of any blockages.
- Specially developed for the cleaning of hard, sticky pollution and blockages.
- The Tower Nozzles are used often at sugar refineries and in cases of extreme hard or tough pollution.

Recommendation:

- If the diameter of the tube is greater than the length of the nozzle, always use a rigid extension lance between the flexible hose and the nozzle.

Notes:



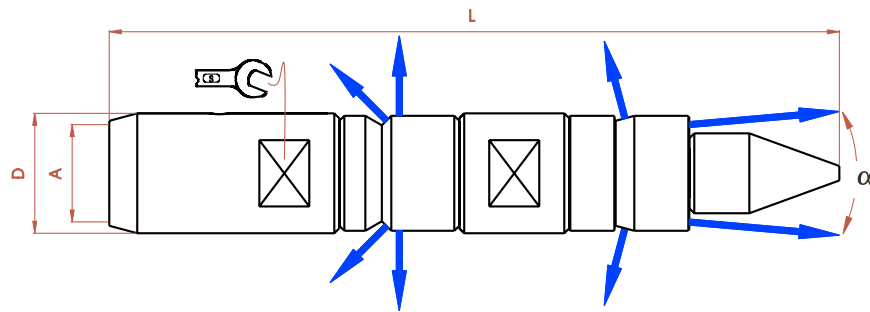

Type TNSFBR Tower Nozzle

D mm	L mm	S mm	α	A	Part Number		Max. W.P. Bar/PSI		
ø10	69	8	10°	M7x1F	6210.210	6210.2101	1000/15.000		
	72			1/16"NPTF	6210.210116	6210.2101116			
				1/4"UNFMPLHF	6210.21014ML	6210.2101114ML	1500/21.500		
				1/4"UNFMPRHF	6210.21014MR	6210.2101114MR			
75	5/16"UNFM	6210.210516		6210.2101516	1000/15.000				
ø12	73	10		1/8"BSPF	6212.212	6212.2121	1250/18.000		
				1/8"NPTF	6212.21218	6212.212118			
				3/8"UNFMPLHF	6101.21238ML	6101.212138ML	1500/21.500		
				3/8"UNFMPRHF	6101.21238MR	6101.212138MR			
ø16	97	13		1/8"BSPF	6216.216	6216.2161	1000/15.000		
ø18	100	16		1/4"BSPF	6218.218	6218.2181			
				1/4"NPTF	6218.21814	6218.218114			
				9/16"UNFMPLHF	6218.218916ML	6218.2181916ML	1500/21.500		
				9/16"UNFMPRHF	6218.218916MR	6218.2181916MR			
ø22	108	19		1/4"BSPF	6222.222	6222.2221	1000/15.000		
				3/8"NPTF	6222.22238N	6222.222138N			
			3/8"BSPF	6222.22238	6222.222138				
ø28	121	25	30°	1/4"BSPF	6228.228	6228.2281	1250/18.000		
	132			1/2"BSPM	6228.228.12M	6228.2281.12M			
	126	26		1/2"NPTF	6228.228.12N	6228.2281.12N			
	132			3/8"BSPM	6228.228.38M	6228.2281.38M			
	137	25		M24x1,5M	6228.228.24M	6228.2281.24M			
ø40	155			-	40°	M24x1,5F	6240.240.24M	6240.2401.24M	1250/18.000
	170	1/4"BSPF				6240.240.14F	6240.2401.14F		
		180				1/4"BSPM	6240.240.14M	6240.2401.14M	
	185					27	3/8"BSPM	6240.240.38M	
		1/2"BSPM					6240.240.12M	6240.2401.12M	
185	27	M24x1,5M	6240.240.24M	6240.2401.24M					

M= Male thread
F= Female thread