

# Type TNSFBB Tower Nozzle



## Rotating Nozzle Type TNSFBB Tower Nozzle

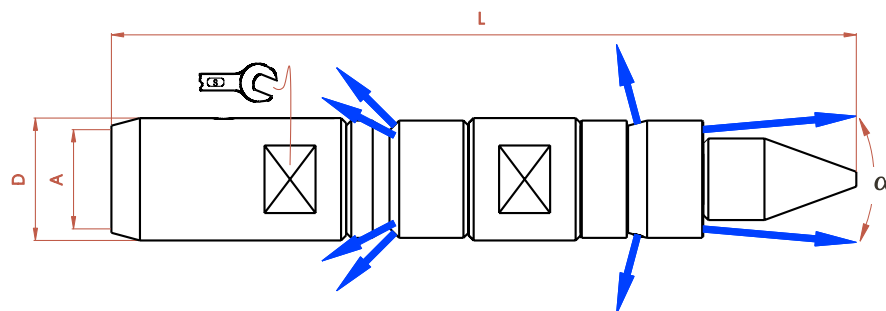
### Characteristics:

- Combination of 2 rotors, in which the rotors turn in opposite directions to give a perfect cleaning result.
- 1 rotor with 4 jets rotating 45° back and 1 rotor with 2 jets rotating 75° to the side and 2 jets rotating to the front.
- Available with one extra front jet for the removal of any blockages.
- Specially developed for the cleaning of hard, sticky pollution and blockages.
- The Tower Nozzles are used often at sugar refineries and in cases of extreme hard or tough pollution.



### Recommendation:

- If the diameter of the tube is greater than the length of the nozzle, always use a rigid extension lance between the flexible hose and the nozzle.

### Notes:



Type TNSFBB Tower Nozzle

D mm	L mm	S mm	$\alpha$	A	Part Number		Max. W.P. Bar/PSI
							
ø10	69	8	10°	M7x1F	6210.310	6210.3101	1000/15.000
	72			1/16"NPTF	6210.310116	6210.3101116	
				1/4"UNFMPLHF	6210.31014ML	6210.3101114ML	1500/21.500
				1/4"UNFMPRHF	6210.31014MR	6210.3101114MR	
75	5/16"UNFM	6210.310516		6210.3101516	1000/15.000		
ø12	73	10		1/8"BSPF	6212.312	6212.3121	1250/18.000
				1/8"NPTF	6212.31218	6212.312118	
				3/8"UNFMPLHF	6101.31238ML	6101.312138ML	1500/21.500
				3/8"UNFMPRHF	6101.31238MR	6101.312138MR	
ø16	97	13		1/8"BSPF	6216.316	6216.3161	1000/15.000
				1/4"BSPF	6218.318	6218.3181	
ø18	100	16		1/4"NPTF	6218.31814	6218.318114	1500/21.500
			9/16"UNFMPLHF	6218.318916ML	6218.3181916ML		
			9/16"UNFMPRHF	6218.318916MR	6218.3181916MR		
			1/4"BSPF	6222.322	6222.3221	1000/15.000	
3/8"NPTF	6222.32238N	6222.322138N					
ø22	108	19	3/8"BSPF	6222.32238	6222.322138		
			1/4"BSPF	6228.328	6228.3281	1250/18.000	
ø28	121	25	1/2"BSPM	6228.328.12M	6228.3281.12M		
	132		1/2"NPTF	6228.328.12N	6228.3281.12N		
	126	25	3/8"BSPM	6228.328.38M	6228.3281.38M		
	132		M24x1,5M	6228.328.24M	6228.3281.24M		
	137		M24x1,5F	6240.340.24M	6240.3401.24M	1250/18.000	
ø40	155	-	1/4"BSPF	6240.340.14F	6240.3401.14F		
	170		1/4"BSPM	6240.340.14M	6240.3401.14M		
	180		3/8"BSPM	6240.340.38M	6240.3401.38M		
			1/2"BSPM	6240.340.12M	6240.3401.12M		
	185		27	M24x1,5M	6240.340.24M	6240.3401.24M	

M= Male thread  
F= Female thread