


A1 Microwave


X-band Satcoms Transmit Filter, Model PB1102WB

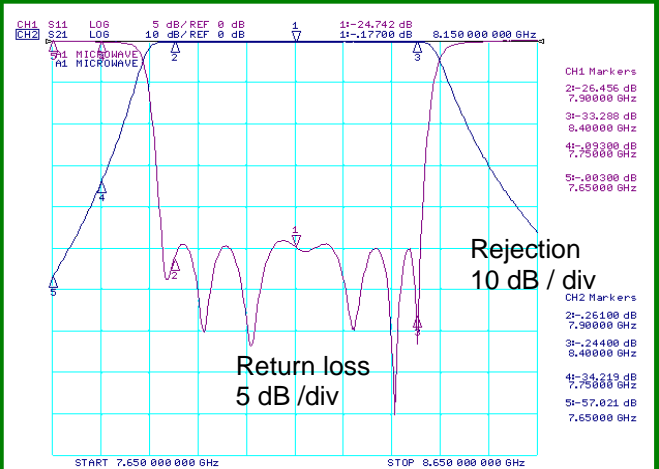

- Low insertion loss
- RX band noise rejection

The PB1102WB bandpass filter is designed for X band satcoms applications for removing receive band noise from transmitter outputs.

The PB1102WB is one of a family of filters for X band transmitter applications.

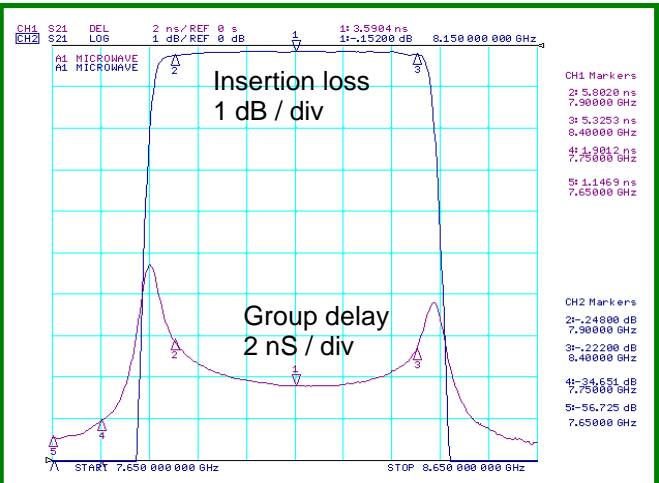

Ordering information :- Model number PB1102WB

Passband	7.9 to 8.4 GHz
Passband insertion loss	0.25 dB typical
Passband return loss	20 dB min
Rejection:	from 7.25 to 7.75 GHz 30 dB min
Overall length	220 mm nominal
Flanges	PBR 84 (alternatives available)

Enquiries@A1Microwave.com is your fastest route to custom designed microwave and RF filters, diplexers, passive coaxial and waveguide components, 100 MHz to 50 GHz

Sales office : A1 Microwave Ltd. 27 Coopers Yard, Newark, Notts, NG24 4UH, England

Telephone : +44 (0) 1636 707 642

Fax : +44 (0) 1636 707 643

E mail : enquiries@A1Microwave.com

Web : <http://www.A1Microwave.com>

Issued :- 08 November 2006