

A1 Microwave

Microwave and RF Filter solutions

1 MHz to 40 GHz **with NO NRE**


Also Transmit arms, Magic Tees, Couplers
and Waveguide passive components

X-band Satcoms Transmit Upconverter Filter, Model PB1030WB



FEATURES :

- 1 - High LO rejection
- 2 - Low insertion loss
- 3 - Compact design

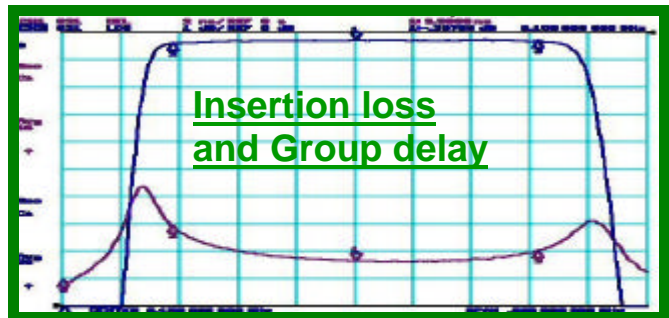

Ordering information :- Model number PB1030WB

Passband	7.9 to 8.4 GHz
Passband insertion loss	0.4 dB typical
Rejection :	from DC to 6.95 GHz 90 dB min
	from 7.25 to 7.75 GHz 35 dB min
Overall length	200 mm nominal
Connectors	SMA female (Waveguide alternatives available)

Sales@A1Microwave.com your fastest route to custom designed filters

A1 Microwave Ltd. Units 1 and 2 Chalet Farm, Sledmere Road, Langtoft, Driffield, East Yorkshire, YO25 3BT, England

Telephone : +44 (0) 1377 267 325

Mobile : +44 (0) 7903 64 64 95

Fax : +44 (0) 1377 267 325

E-mail : Sales@A1Microwave.com

Web : <http://www.A1Microwave.com>

Issued :- 02 March 2004