


Rotary Nozzle RTH

The Rotating Nozzle with RTH-Rotor has 4 jets directed backwards providing simultaneous cleaning and advance of the nozzle (rotating and thrust jets in one function)
 This Rotating Nozzle is suitable for flushing out weak roots, loosened debris and rubble, as well as soft lime and concrete.
 Maximum pressure 300 Bar.

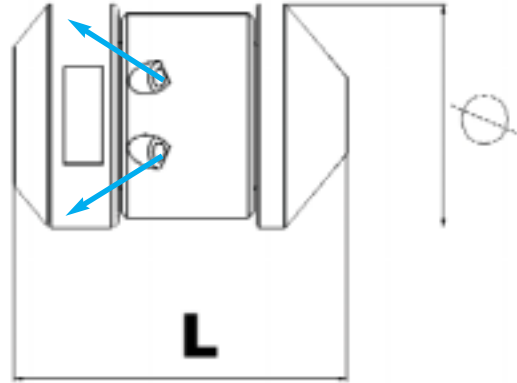

Order No.	Designation	Weight (Kg)	Dimensions L x Ø (mm)	Connection	Inserts	Scope of Application (Ø mm)
2901	RTH 22	0.15	50x22	1/8"	4 drilled	30-100
2902	RTH 22	0.15	50x22	1/4"	4 drilled	30-100
2903	RTH 28	0.20	60x28	1/4"	4 x RT M4x0.7 Ceramic/Sapphire	40-100
2904	RTH 28	0.20	60x28	3/8"	4 x RT M4x0.7 Ceramic/Sapphire	40-100
2905	RTH 40	0.55	83x40	1/2"	4 x RT M6x1 Ceramic/Sapphire	70-150
2906	RTH 40	0.55	83x40	3/4"	4 x RT M6x1 Ceramic/Sapphire	70-150
2907	RTH 50	1.00	93x50	3/4"	7 x M6x1 Ceramic/Sapphire 4 x RT / 3 x RS	90-200
2908	RTH 60	1.40	103x60	3/4"	4 x RT M6x1 3 x RS M8x1 Ceramic/Sapphire	90-200
2909	RTH 60	1.40	103x60	1"	4 x RT M6x1 3 x RS M8x1 Ceramic/Sapphire	100-300
2910	RTH 100	7.40	180x100	1"	7 x M6x1 Ceramic 4 x RT / 3 x RS	200-600
2911	RTH 100	7.40	180x100	1 1/4"	7 x M6x1 Ceramic 4 x RT / 3 x RS	200-600
2912	RTH 150	21.50	262x150	1 1/2"	10 x M10x1 Ceramic 4 x RT / 6 x RS	200-1000

RT = Rotor RS = Thrust

The Rotating Nozzle RTH 50 and RTH 60 are also available without thrust.