

SG-30 Free Spinner for Surface Cleaning

The simple self-rotating solution for surface cleaning applications



Clean belts, screens, conveyors


Degrease, decontaminate concrete

Clean airport runways

Scarify concrete for coatings

Clean paint line carriers

Build custom surface cleaners

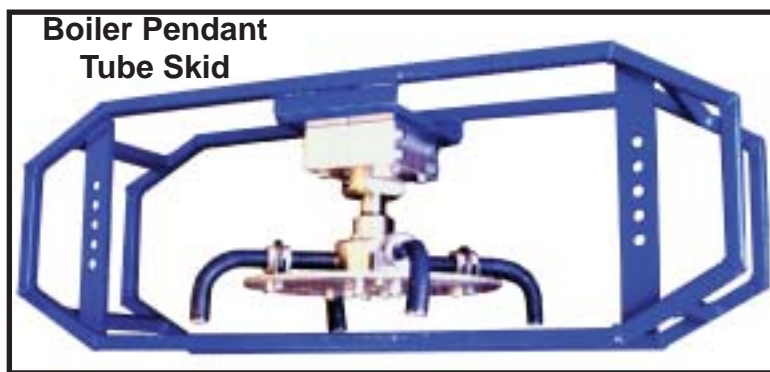

Examples of custom systems based on the **SG-30 Free Spinner**

Specifications

Model	SG-30-P12	SG-30-A12
Swivel Used	SG-CCN-P12K	SG-CCN-A12K
Max. Pressure	15 Kpsi 1000 bar	20 Kpsi 1380 bar
Rotation Speed	300 - 1,000 rpm	300 - 1,000 rpm
Rotation Diameter		
4-Arm Small	18 in. 46 cm	18 in. 46 cm
4-Arm Large	24 in. 62 cm	24 in. 62 cm
Inlet Ports	3/4 npt 0° or 90°	3/4 MP * 0° or 90°
Flow Capacity	60 gpm 230 l/min	50 gpm 190 l/min
Flow Rating	2.3 Cv	2.0 Cv
Height Overall	13 in. 33 cm	13 in. 33 cm
Weight	25 lb 11.3 kg	26 lb 11.8 kg

* Cone & Thread Medium Pressure Connection
Mounting Holes - Four 3/8 in. ID, 2.75 x 3.75 in. spacing

- Self-rotating 15 Kpsi & 20 Kpsi models
- Radiused jet arms for excellent jet quality
- Replaceable 1/4 npt **AP4 Nozzle Tips**, pg. 45
- Aluminum mounting block
- Balanced, stable, rotating jet assembly
- 18 or 24 in. jet path diameter