


SG-40, 50, 60, 70 Powered Rotation

Reliable rotation independent of flow or pressure




Runway Cleaner

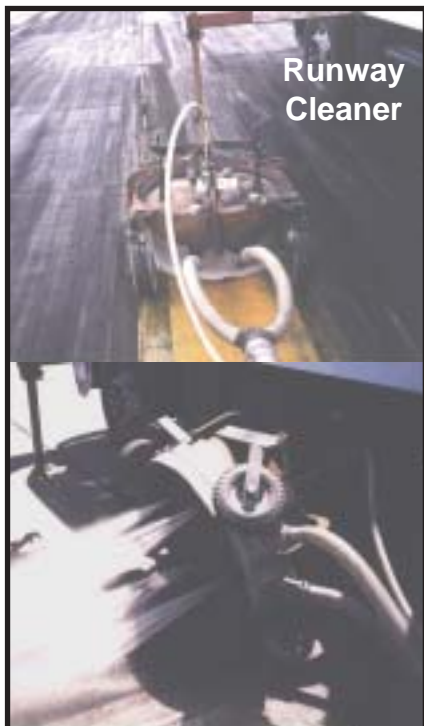


SG-40, 50
Fast Rotation
Belt Drive

Scarify concrete for coatings
Clean heat exchanger bundles
Remove refractory

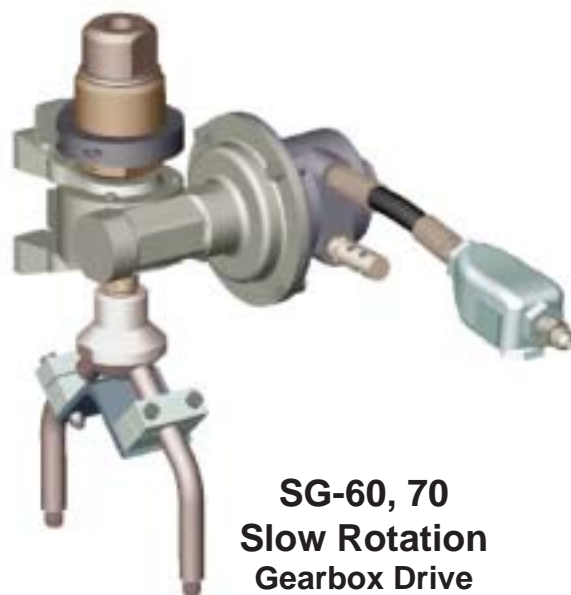


SG-60, 70
Slow Rotation
Gearbox Drive

Clean conveyors, belts, chain
Clean stacks, tanks, tunnels
Remove paint stripes, rubber

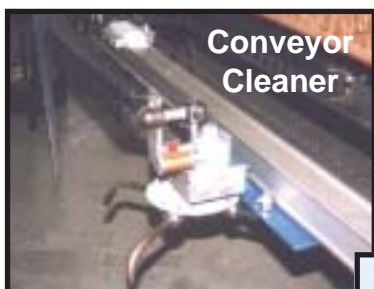

Conveyor Cleaner

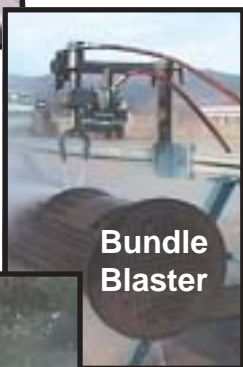

Bundle Blaster



Surface Cleaner

Specifications

| Drive | Air | SG-40 | SG-60 |
|----------------------|------------|---|--|
| | Hydraulic | SG-50 | SG-70 |
| Swivel | | SG-CCN-P12K | SG-P12KML |
| Max. Pressure | | 15 Kpsi 1,000 bar | 15 Kpsi 1,000 bar |
| Flow Rating | | 2.3 Cv | 5.0 Cv |
| Flow Capacity | | 50 gpm 230 lpm | 110 gpm 420 lpm |
| Inlet Port | | 3/4 npt | 3/4 npt |
| Outlet Shaft | | 1-1/8 in. K** | 3/4 npt |
| Swivel | | SG-CCN-A12K | SG-A12KML |
| Max. Pressure | | 20 Kpsi 1,380 bar | 20 Kpsi 1,380 bar |
| Flow Rating | | 2.0 Cv | 2.0 Cv |
| Flow Capacity | | 50 gpm 190 lpm | 50 gpm 190 lpm |
| Inlet Port | | 3/4 MP* | 3/4 MP* |
| Outlet Shaft | | 1-1/8 in. K** | 3/4 or 1 MP* |
| Rotation Speed | | | |
| Slow | 60:1 Ratio | NA | 8 - 40 rpm |
| Medium | 10:1 Ratio | NA | 50 - 250 rpm |
| Fast | 2:1 Ratio | 250 - 1,000 rpm | NA |
| Mounts | | Four 5/16-18 NC 2.25 X 8 in. Spacing | Four 5/16 in. Holes 2.48 x 3.88 in. |
| Spacing | | | |
| Air Supply at 80 psi | | 40 CFM 20 l/sec | 40 CFM 20 l/sec |
| Weight, without Head | | 26 lb 11.8 kg | 40 lb 18.1 kg |

* MP Medium Pressure Cone & Thread **1-1/8 in. Ø O-ring