


BRUD Positioner

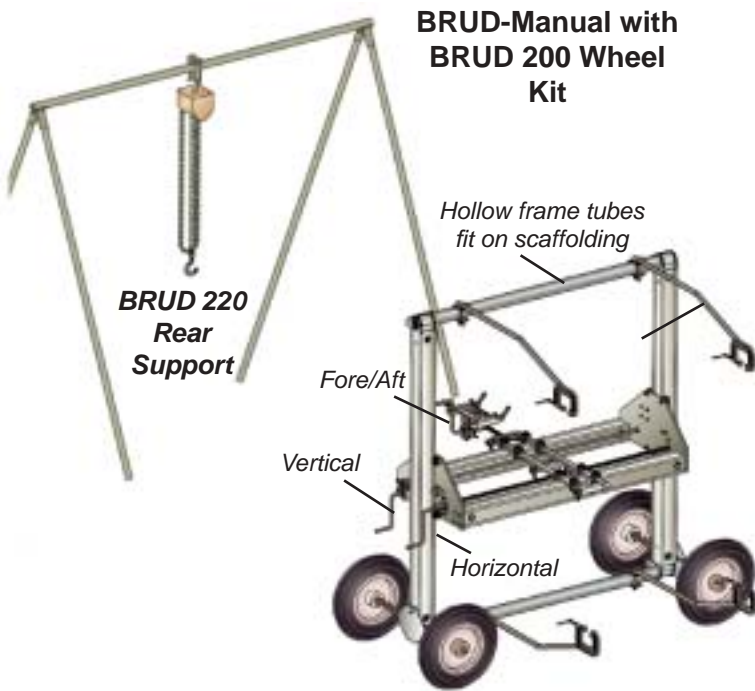

- Mounts lancing machine to bundle**
- Moves lances from tube to tube**
- For horizontal or vertical lancing**
- Air or hydraulic powered option**
- Fits scaffolding for vertical lancing**
- 4.1 Foot square operating window**

- Lightweight, strong tubular frame
- Easy mounting of Lancing Machine
- Easy conversion to air operation
- Corrosion-resistant materials and coatings

Specifications

Model	BRUD-M XY Positioner		BRUD 220 Rear Support		BRUD 200 Wheel Kit		BRUD 210 Air Power Kit*	
XY Range	4.1 ft	1.25 m						
Weight	140 lb	64 kg	96 lb	44 kg	175 lb	79 kg	40 lb	18 kg
*Requires CB 200 Control Kit and 30-50 cfm 80-100 psi air supply - Hydraulic motors also available								

CB-2D Pneumatic Control Box

The **CB-2D Control Box** is needed to operate the lancing system's air motors. It's simple to set up, operate, and move about. An air filter and lubricator are included to keep the air motors going strong. The **CB-2D Control Box** will not operate hydraulic powered lancing systems, and Aquapower does not make hydraulic controls.

Specifications

Model	CB-2D		CB 200 Kit	
Rotation	On/Off			
Stroke	Fwd/Back			
Stroke Speed				
Forward	Regulated			
Back	Regulated			
X Motion (Left/Right)	Manual		Left/Right	
Y Motion (Up/Down)	Manual		Up/Down	
z Motion (Fore/Aft)	Manual		Fore/Aft	
Air Hoses Included	3		6	
Weight	51 lb	23 kg	47 lb	21 kg

