

MkV Rewind Slitting machine

A machine for the rapid conversion of stretch and cling film products. The modular construction offers maximum flexibility, allowing one machine to be supplied in different forms.




Machine Specification:-

- ❑ Slitting or rewind only options available
- ❑ Variable speed AC 1.5 Kw drive up to 800 metres per minute
- ❑ Fixed tension wind with quick release belt also allowing adjustable pneumatic tension.
- ❑ Front loading parent roll which allows the film to be threaded quickly.
- ❑ Adjustable pneumatic braking with timer release.
- ❑ Web width up to 600mm and 1000mm as standard, wider options available to order.
- ❑ Single arms as standard, with the option of turret or pneumatic rewind arms.
- ❑ Maximum rewind roll diameter 280mm (twin turret 140mm).
- ❑ Maximum parent roll diameter 500mm.
- ❑ Rewind collets to suit cores from 25mm to 76mm.
- ❑ Optional roll loading trolley available.
- ❑ Enclosed guarding and CE approved.
- ❑ 240v 3 Phase supply


Machine Features



Lightweight front guard.

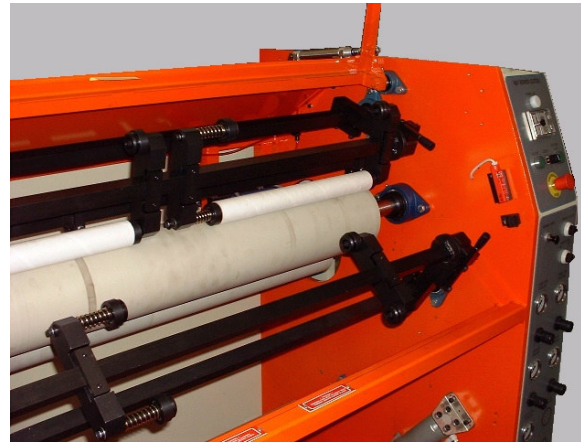

Optional turret arms.

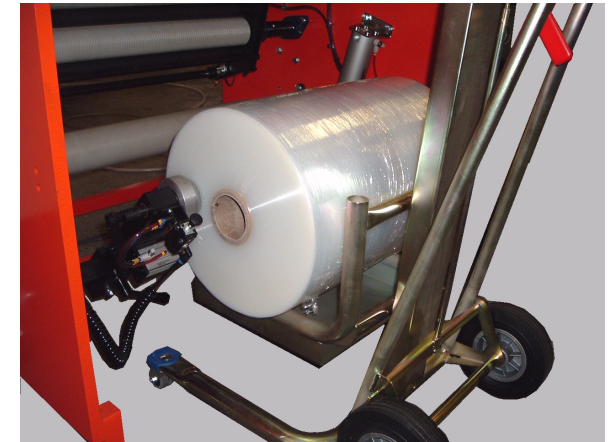

Convenient roll handling trolley.



HolloWrap Ltd

8 Highmeres Rd
Leicester LE4 9LZ
England

Ph +44 116 2760206 Fax +44 116 2742995

sales@hollowrap.com / www.hollowrap.com

HolloWrap™
CORELESS TECHNOLOGY

Designing, Manufacturing & Supplying

Slitting, Rewinding, Prestretch, Perforators & Special Purpose Machines