

## H.S.A 600-2 High Speed Automatic Rewind Machine


An automatic surface driven machine designed for the rapid conversion of stretch and cling films. The layout and design of the machine make it easy to operate and the simple web path allows for rapid changing of the parent rolls.

### Specification


- ❑ 4 Kw AC variable speed drive up to 1100 Metres per minute.
- ❑ Production rate of up to 2.5 rolls per minute (300m length rolls)
- ❑ Programmable Human Machine Interface (HMI) for accurate length and precise braking.
- ❑ Full fault diagnostics via the HMI unit.
- ❑ Fully automatic cycle with Programmable Logic Controller (PLC) control.
- ❑ Master roll maximum diameter 600mm. Film width 250mm to 600mm  
Core diameter 76mm.
- ❑ Rewind roll maximum diameter 150mm. Core width 250mm to 630mm.  
Core diameter 25mm, 38mm, 50mm, 76mm to be specified on order.
- ❑ Totally enclosed interlocked guarding ensuring maximum operator safety
- ❑ Large parent roll capacity allows one operator to monitor cells of more than one machine.
- ❑ 3 phase 400/480 volt supply.
- ❑ Guarding and controls to suit current CE regulations.



### Machine Features.

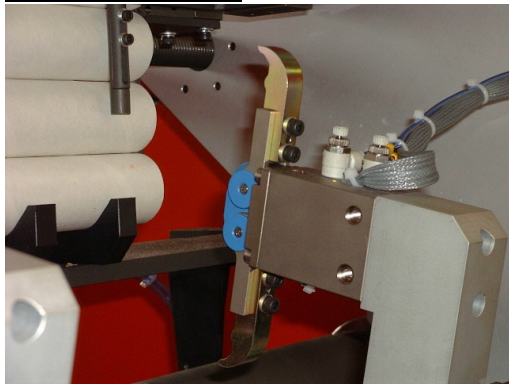

Mechanical core grippers.

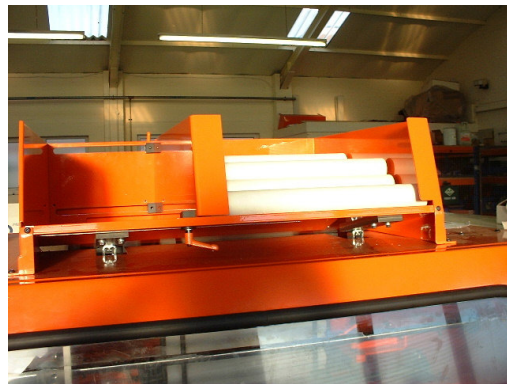

Overhead core hopper.



Film break sensor.



HMI control.



**HollowWrap Ltd**

8 Highmeres Rd  
Leicester LE4 9LZ  
England

Ph +44 116 2760206 Fax +44 116 2742995

[sales@hollowwrap.com](mailto:sales@hollowwrap.com) / [www.hollowwrap.com](http://www.hollowwrap.com)

**Designing, Manufacturing & Supplying**

Slitting, Rewinding, Prestretch, Perforators & Special Purpose Machines