



PHOENIX
industrial flooring limited

PHOENIX INDUSTRIAL FLOORING LTD
UNITS 15 & 16 LITTLETON BUSINESS PARK,
LITTLETON DRIVE,
HUNTINGTON,
CANNOCK,
STAFFORDSHIRE
WS12 4TR


Tel: +44 (0)1543 466 906 Fax: +44 (0)1543 466 907
Email: info@phoenixflooring.co.uk
Web: www.phoenixflooring.co.uk

CHROMAFLOOR

Description

Chromafloor is a decorative, Slip Resistant, Resin bound coloured Quartz screed.

Chromafloor is available in a wide range of colour combinations and surface textures applied at a nominal thickness of 4-5mm and can, with the use of trims, provide designer features and is also suitable for the application of coved skirting and vertical surfaces

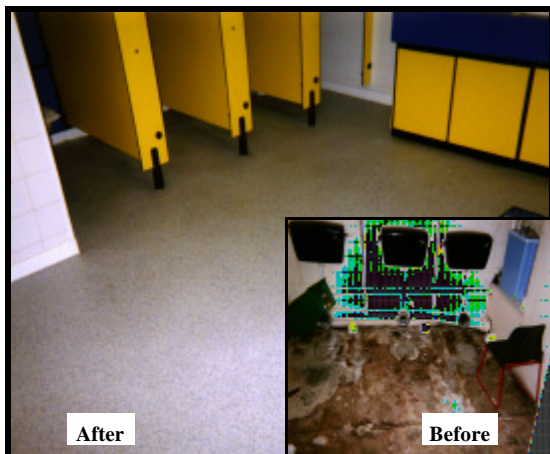

Advantages

Chromafloor is offered as a single source supply and apply package with a guarantee covering both supply and installation.

Chromafloor provides an insitu applied, Hard Wearing, Slip Resistant surface suitable for both mechanical and pedestrian traffic.

Chromafloor is resistant to a wide range of chemicals (for specific advice please contact **Phoenix Industrial Flooring Ltd**)

Chromafloor is resistant to aggressive cleaning regimes and can be applied to most construction surfaces but an Elastomeric Membrane will be required on Steel, Timber, MDF or surfaces where substrate movement could occur.

Chromafloor is based on a low odour resin system and is generally suitable for use in areas where tainting may be an issue during application.












Chromafloor is Seamless, Watertight and Resistant to Abrasion and Scratching.

Chromafloor is suitable for Refurbishment and New Build contracts.

Applications:

Chromafloor is suitable for use in the following areas:

- Retail Spaces
- Shopping Malls
- Leisure Facilities
- Restaurants
- Kitchens
- Food Preparation
- Manufacturing
- General Industrial



TECHNICAL DATA

APPLIED THICKNESS:

Nominal 4—5 mm

RESIN SOLIDS CONTENT:

100%

SURFACE FINISH:

Either Gloss or Matt

POROSITY:

Impermeable when sealed

COMPRESSIVE STRENGTH:

78—86 N/mm²

BOND STRENGTH:

Greater than cohesive strength of concrete

CHEMICAL RESISTANCE:

Generally Excellent.

Contact Phoenix Industrial Flooring Ltd for specific information

SLIP RESISTANCE:

Conforms to BS. 6677 (Various textures available to suit specific requirements)

CLEANING:

Brush, Wet Mopping, Vacuum or Mechanical with Revolving Brushes
(The use of Detergents in the PH range 4—12 is permitted)

TEMPERATURE RESISTANCE:

60°C Max Continuous

PLEASE NOTE THAT COLOURS DISPLAYED HAVE BEEN REPRODUCED
BY COMPUTER AND MAY VARY SLIGHTLY FROM ACTUAL PRODUCT.
SAMPLES ARE AVAILABLE BY REQUEST

**PHOENIX INDUSTRIAL FLOORING LTD, UNITS 15 & 16 LITTLETON BUSINESS PARK,
LITTLETON DRIVE, HUNTINGTON, CANNOCK, STAFFORDSHIRE WS12 4TQ**

Tel: +44 (0)1543 466 906 Fax: +44 (0)1543 466 907

Email: info@phoenixflooring.co.uk Web: www.phoenixflooring.co.uk