


# A1 Microwave


## C-band Satcoms Transmitter RX Reject Filter, Model PB1011WH

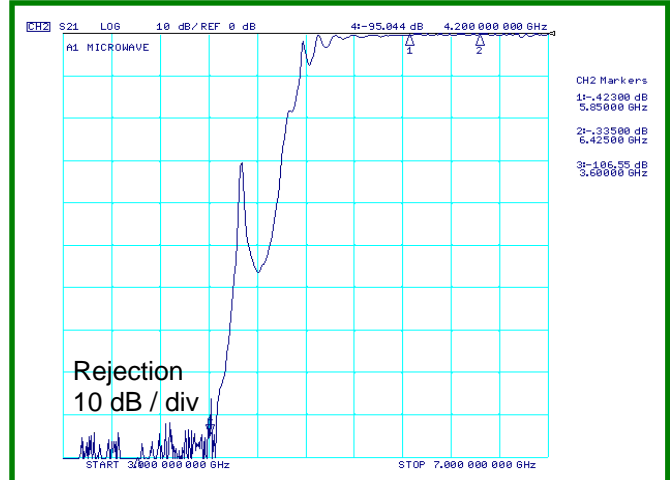

- High receive band noise rejection
- Low insertion loss

The PB1011WH highpass filter is designed for use as an output filter in C-band satcoms HPAs to suppress receive band noise.

The PB1011WH is one of a family of filters covering the C-band transmit bands.

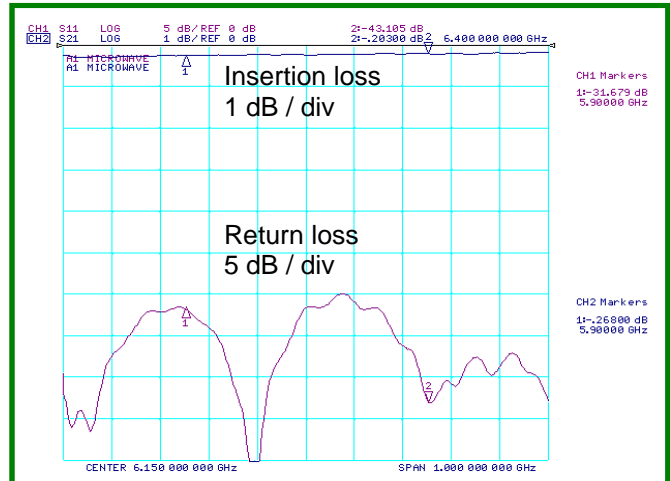

### Ordering information :- Model number PB1011WH

Passband	5.9 to 6.4 GHz
Passband insertion loss	0.1 dB typical
Rejection : from 3.6 to 4.2 GHz	80 dB min
Overall length	229 mm nominal
Weight	585 g
Flanges	CPR 137 G (alternatives available)

**Enquiries@A1Microwave.com is your fastest route to custom designed microwave and RF filters, duplexers, passive coaxial and waveguide components, 100 MHz to 50 GHz**

Sales office : A1 Microwave Ltd. 27 Coopers Yard, Newark, Notts, NG24 4UH, England

Telephone : +44 (0) 1636 707 642

Fax : +44 (0) 1636 707 643

E mail : enquiries@A1Microwave.com

Web : <http://www.A1Microwave.com>

Issued :- 23 October 2006