


A1 Microwave

Microwave and RF Filter solutions

1 MHz to 40 GHz **with NO NRE**


Also Transmit arms, Magic Tees, Couplers
and Waveguide passive components

C-band Satcoms Tx Harmonic Reject Filter, Model PB1010WL

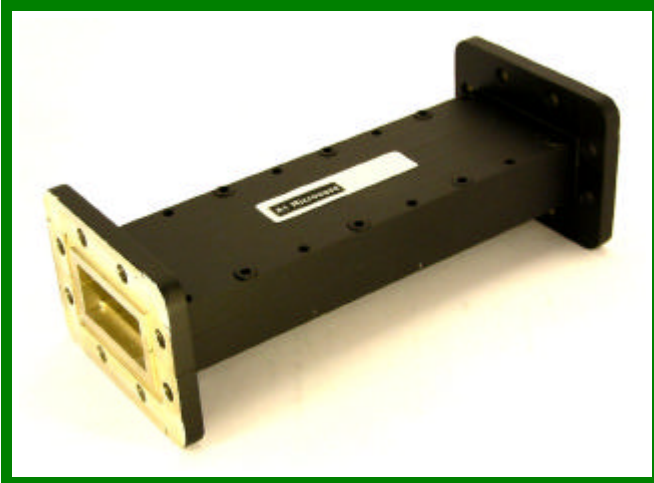

FEATURES :

- 1 - 'No tuners' design for :-
- 2 - Low insertion loss
- 3 - High harmonic rejection

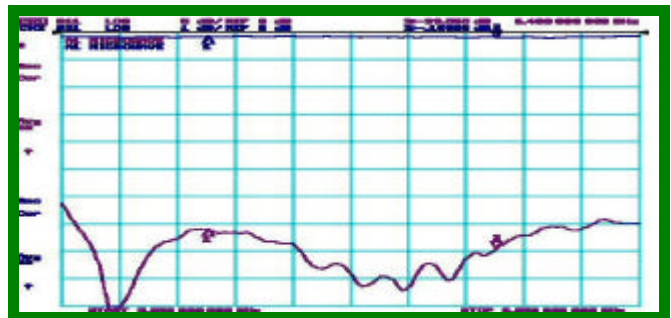

Ordering information :- Model number PB1010WL

Passband	5.9 to 6.4 GHz
Passband insertion loss	0.1 dB typical
Rejection :	
2nd and 4th harmonic	60 dB min
3rd harmonic	90 dB min
Overall length	152 mm nominal
Weight	585 g
Flanges	UER 70 (alternatives available)

Sales@A1Microwave.com your fastest route to custom designed filters

A1 Microwave Ltd. Units 1 and 2 Chalet Farm, Sledmere Road, Langtoft, Driffield, East Yorkshire, YO25 3BT, England

Telephone : +44 (0) 1377 267 325

Mobile : +44 (0) 7903 64 64 95

Fax : +44 (0) 1377 267 325

E-mail : Sales@A1Microwave.com

Web : <http://www.A1Microwave.com>

Issued :- 02 March 2004