


A1 Microwave


DBS-band Satcom coupler, PB1186WX

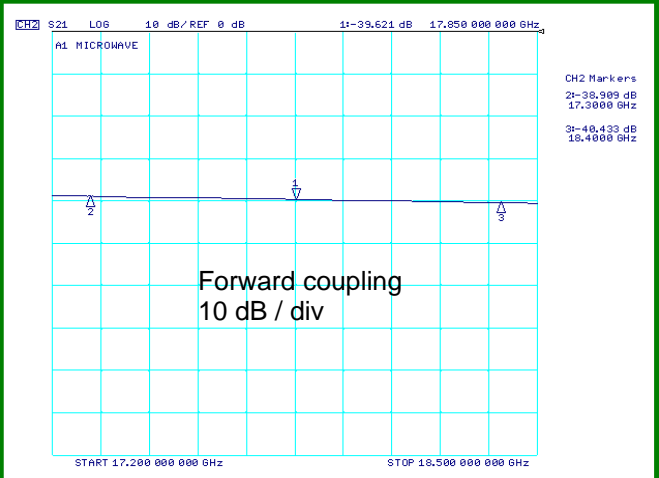

- Compact size
- Full waveguide band performance

The PB1186WX directional coupler is designed for DBS band satcoms applications to monitor or inject signals into the main waveguide.

The PB1186WX is one of a family of couplers covering all the standard waveguide sizes.

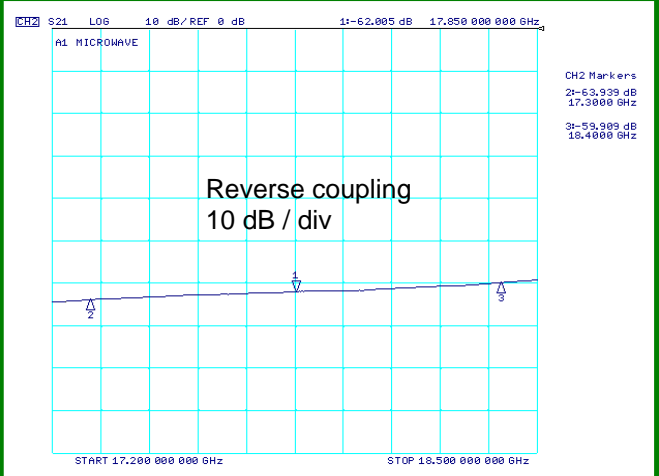

Ordering information :- Model number PB1186WX

Passband	17.3 to 18.4 GHz
Forward coupling	40 dB +/- 1.5 dB
Directivity	20 dB min

Overall length	80 mm
Flanges	UBR 140
Coupled port	SMA female
(alternative flanges and coax interfaces available on all ports)	

Enquiries@A1Microwave.com is your fastest route to custom designed microwave and RF filters, diplexers, passive coaxial and waveguide components, 100 MHz to 50 GHz

Sales office : A1 Microwave Ltd. 27 Coopers Yard, Newark, Notts, NG24 4UH, England

Telephone : +44 (0) 1636 707 642

Fax : +44 (0) 1636 707 643

E mail : enquiries@A1Microwave.com

Web : <http://www.A1Microwave.com>

Issued :- 25 August 2006