


A1 Microwave


Ku-band Satcom RX Diplexer PB1309WD

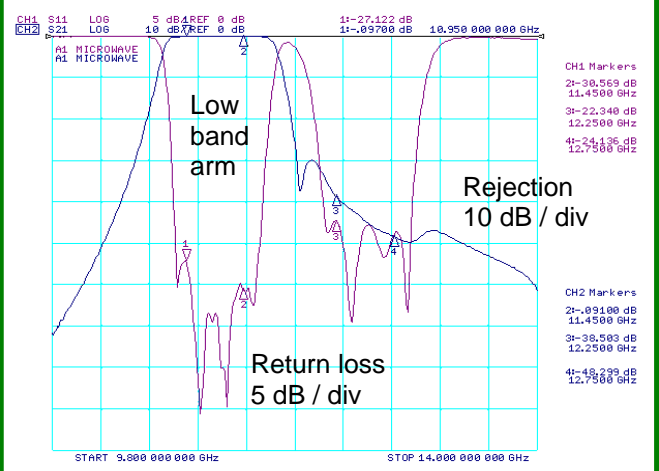

- Low insertion loss
- Compact design

The PB1309WD diplexer is designed to separate low and high receive bands from a common antenna port with minimum insertion loss and minimum size.

The PB1309WD is one of a family of diplexers for Ku band RX band separation.

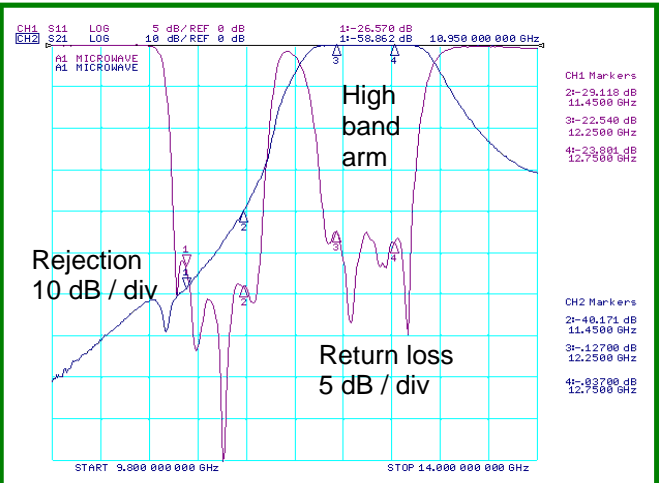

Ordering information :- Model number PB1309WD

Passbands	10.95 to 11.45 GHz and 12.25 to 12.75 GHz
Passband insertion loss	0.1 dB typical
Passband return loss	20 dB min
Rejection: of alternate band	35 dB min
Overall length	100 mm
Port separation	50 mm (alternative separations are available)
Flanges	UBR 120 (alternative flanges and coax interfaces available)

Enquiries@A1Microwave.com is your fastest route to custom designed microwave and RF filters, diplexers, passive coaxial and waveguide components, 100 MHz to 50 GHz

Sales office : A1 Microwave Ltd. 27 Coopers Yard, Newark, Notts, NG24 4UH, England

Telephone : +44 (0) 1636 707 642

Fax : +44 (0) 1636 707 643

E mail : enquiries@A1Microwave.com

Web : <http://www.A1Microwave.com>

Issued :- 02 May 2006