


A1 Microwave

X-band Satcoms RX notch, Model PB1078WN

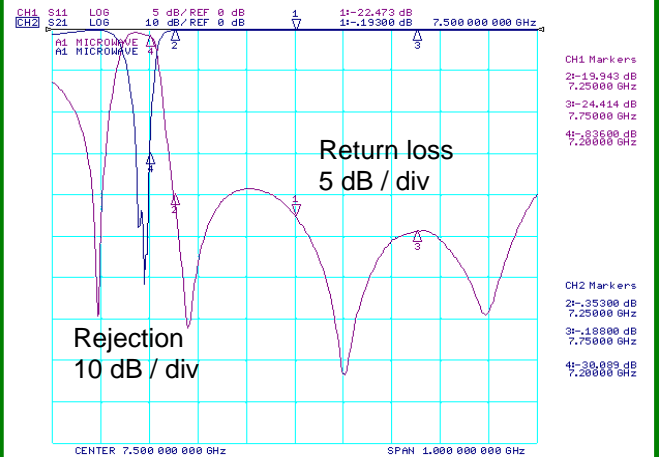

- Low insertion loss
- High spot frequency rejection

The PB1078WN notch filter is designed for X band satcoms receiver applications for suppressing close in spot frequency interference.

The PB1078WN is one of a family of filters covering the standard X band transmit and receive bands.

Ordering information :- Model number PB1078WN

Passband	7.25 to 7.75 GHz
Passband insertion loss	0.4 dB max
Passband return loss	18 dB min
Rejection: at 7200 MHz	25 dB min
Overall length	180 mm nominal
Connectors	SMA female (alternatives available)

Enquiries@A1Microwave.com is your fastest route to custom designed microwave and RF filters, duplexers, passive coaxial and waveguide components, 100 MHz to 50 GHz

Sales office : A1 Microwave Ltd. 27 Coopers Yard, Newark, Notts, NG24 4UH, England

Telephone : +44 (0) 1636 707 642

Fax : +44 (0) 1636 707 643

E mail : enquiries@A1Microwave.com

Web : <http://www.A1Microwave.com>

Issued :- 09 November 2006