


# Custom Lancing Machines

The BRLM lancing rail, with special modification fits a variety of waterblast jobs

Maintain throughput and efficiency with cleaning equipment designed specifically for couch rolls. Powerful air or hydraulic motors drive rotation and stroke at just the right speed for thorough cleaning, while keeping the operator away from the hazards of high pressure water and debris. Please specify length and diameters of all rolls to be cleaned when ordering.

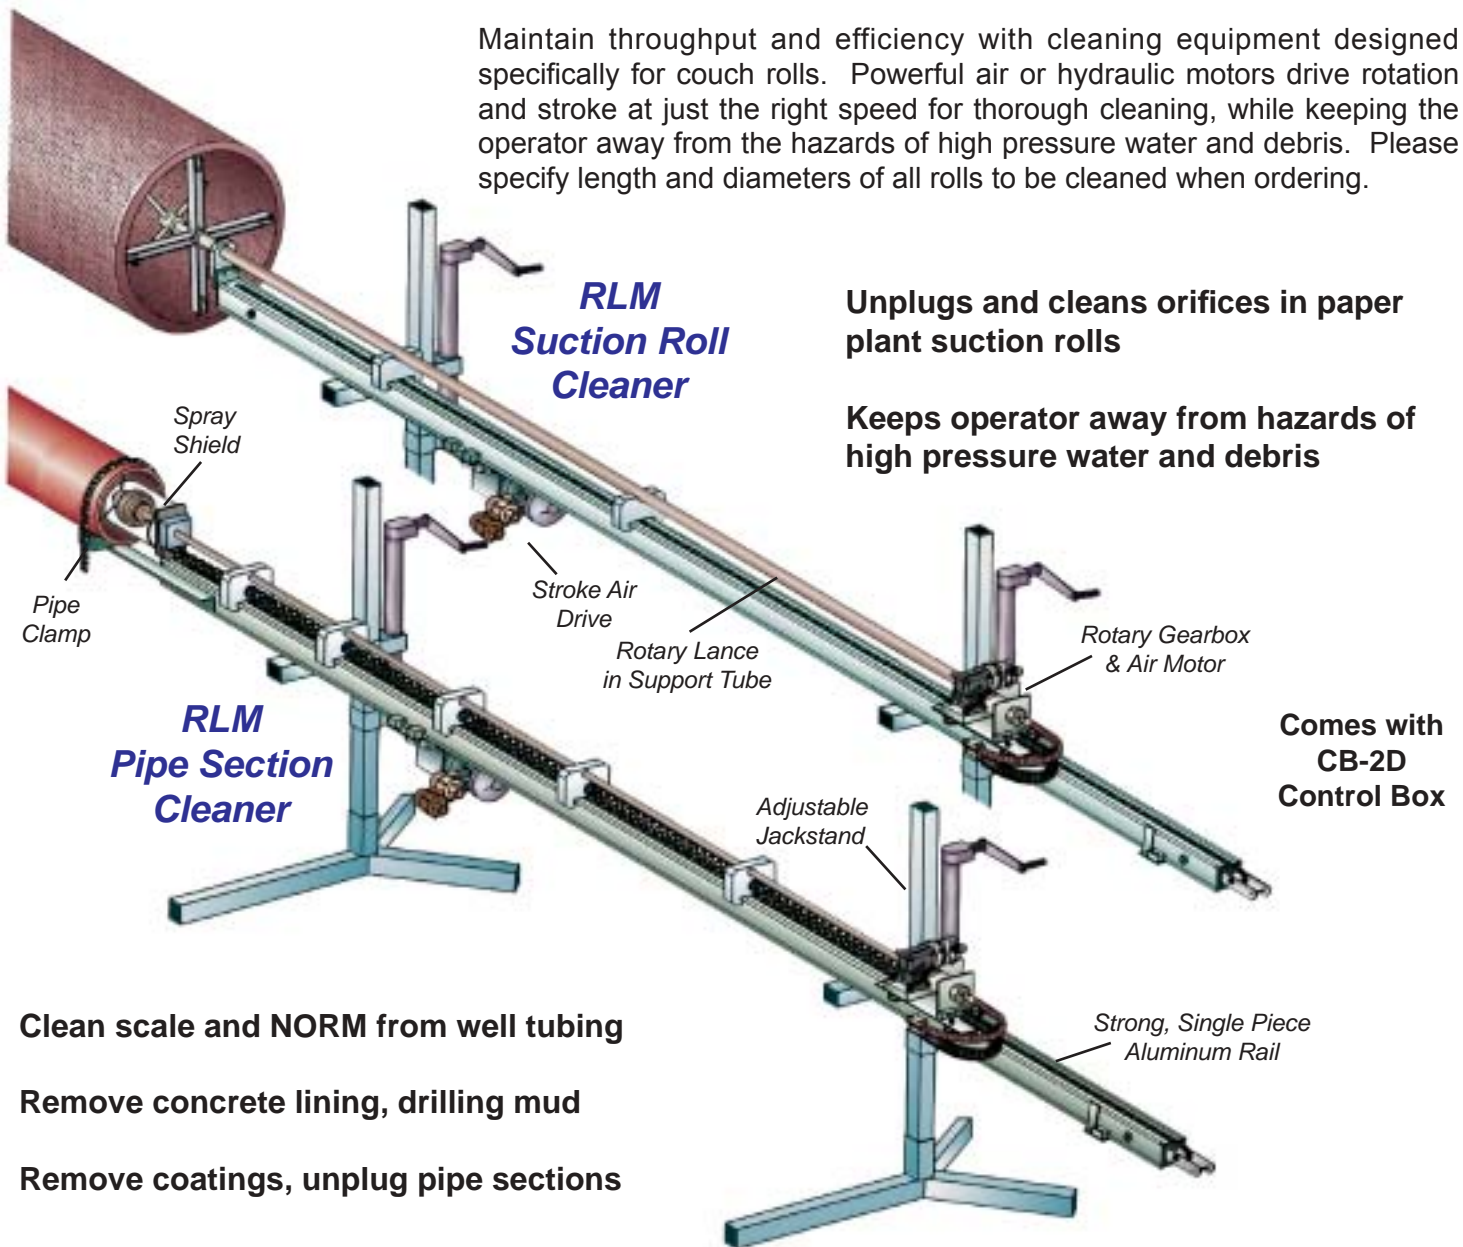

Clean scale and NORM from well tubing

Remove concrete lining, drilling mud

Remove coatings, unplug pipe sections

## Specifications

Model	Suction Roll Cleaner	Pipe Section Cleaner
Max. Pressure	10 Kpsi 690 bar	15 or 20 Kpsi or 1030 or 1380 bar
Stroke *	22 ft 7.0 m	22 ft 7.0 m
Rail Length *	25 ft 7.6 m	25 ft 7.6 m
Weight *	270 lb 95 kg	350 lb 160 kg
Flow Capacity	50 gpm 190 lpm	50 gpm 190 lpm
Rotation Speed	10-50 rpm	50-300 rpm
Stroke Speed	.05-2 ft/sec 1.5-6 cm/sec	.5-2 ft/sec 15-60 cm/sec
Air Requirement	80-130 cfm @ 80-100 psi 2.3-3.6 m <sup>3</sup> /min @ 6-7 bar	
* Length custom-designed for customer's application Air or hydraulic power available		

Where pipe lengths are handled on racks, and many thousands of feet need cleaning, the **RLM Pipe Section Cleaner** offers safe, productive, and thorough results. Having set rotation and stroke speeds for best results, every section cleaned gets the same consistent treatment. Please specify diameter and length range to be cleaned when ordering.